


Heat Conducting Socket

Product Description

The heat conducting socket allows not only for a fixation of busbars or fuses. In comparison to the current state of the art this product allows heat conduction. This leads to a significant temperature drop on the busbars, which leads to a higher lifetime and a higher performance in any closed cases where no active cooling is applicable.

Heat conducting socket

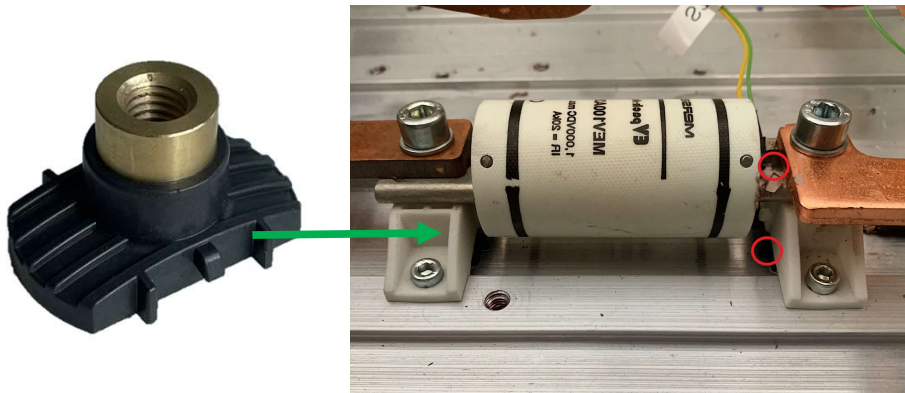


Technical Data

Thermal conductance	4 W/mK
Dielectric strength DC	>4 kV
Dielectric strength AC	>6 kV
Maximum Torque	45Nm

Current Variants.

Dimensions (mm) (LxWxH)	36 x 19 x (22, 30, 40)
Thread Insert & Threaded Bar Diameter	M5 / M8 / M10

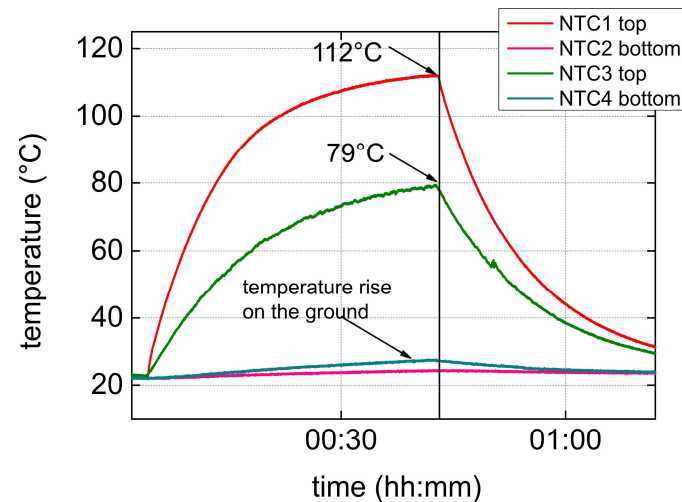

Contact information

Eugen Forschner GmbH
 Tel. +49 7424 943-268
 s.kimmich@forschner.com
www.forschner.com